

Applicable MIL-STD-810C/D/E/F

Applicable MIL-STD	810C		810D		810E		810F	
	Methods	Procedures	Methods	Procedures	Methods	Procedures	Methods	Procedures
Low Pressure	500.1	1	500.2	1,2	500.3	1,2	500.4	1
High Temperature	501.1	1,2	501.2	1,2	501.3	1,2	501.4	1,2
Low Temperature	502.1	1	502.2	1,2	502.3	1,2	502.4	1,2
Temp. Shock	503.1	1	503.2	1	503.3	1	503.4	1
Solar Radiation	505.1	1	505.2	1	505.3	1	505.4	1,2
Rain	506.1	2	506.2	2	506.3	1,2	506.4	1,2
Humidity	507.1	2	507.2	2,3	507.3	2,3	507.4	1
Salt Fog	509.1	1	509.2	1	509.3	1	509.4	1
Dust	510.1	1	510.2	1	510.3	1	510.4	1
Vibration	514.2	8,10	514.3	1	514.4	1	514.5	1
Shock	516.2	1,2,5	516.3	1,4	516.4	1,4	516.5	1,4

General

Frequency Range(MHz)	VHF: 136-174 UHF: 400-420 440-470 450-470 450-480 470-490 420-450 420-470 350-390
Channel Capacity	16
Channel Spacing(KHz)	25 /12.5
Operating Voltage(v)	7.5
Battery	1200mAh (Li-ion)
Battery Life (5-5-90 Duty Cycle)	
1200mAh Li-ion battery	More than 9 hours
1300mAh Ni-MH battery	More than 9 hours
2000mAh Li-ion battery	More than 14 hours
Frequency Stability(ppm)	± 2.5
Operating Temperature(°C)	-20~+50
Antenna Impedance(Ω)	50
Dimensions (H×W×D)(with battery, without antenna)(mm)	119×55×33
Weight (with antenna & battery)(g)	270

Transmitter

RF Power Output	5W/2W(VHF) 5W/2W(UHF)
Modulation	F3E
Spurious and Harmonics	-36dBm<1GHz -30dBm>1GHz
FM Noise	40/34dB
Audio Distortion	≤ 5 %

All Specifications are tested according to TIA/EIA-603, and subject to change without notice due to continuous development.

Receiver

Sensitivity	0.25/0.28 μ V
Selectivity	70/60dB
Intermodulation	≥ 60dB
Spurious Response Rejection	≥ 70dB
S/N	45/40dB
Rated Audio Power Output	800mW
Rated Audio Distortion	≤ 5%

TC-618

Professional Two-way Radio



- Water Resistant
- Superior Audio Quality
- LED Battery Indicator
- Robust Structural Design




Hytera Communications Corporation Limited

Address: HYT Tower, Hi-Tech Industrial Park North, Beihuan Rd., Nanshan District, Shenzhen, China
Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057
Http: //www.hytera.com

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Co., Ltd. © 2012 Hytera Co., Ltd. All Rights Reserved.

Your Local Dealer

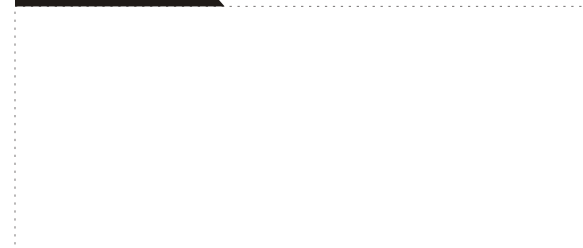

EN1012022A

www.hytera.com

Hytera Communications Corporation Limited

The HYT TC-618 Two-way radio is customized for users working in harsh conditions. Superior dust and water protection increases efficiency while prolonging radio life.



TC-618

Professional Two-way Radio

Key Features

Ingress Protection IP66 *

Ensures protection against dust and strong water jets.

Robust Housing

Double Injection Molding technology provides high reliability against accidental drop and provides a comfortable feel.

Superior Audio Quality

A large 45mm diameter speaker delivers crisp and clear audio.

LED Battery Indicator

The tri-colour LED indicates battery strength at a push of the programmable side buttons.

Unique Structural Design

The battery latch provides secure connections between battery and radio, as well as ease-of-use.

* IP66 water protection ensures the radio to be protected against a water jet for one minute. The diameter of the water jet is 40 mm.

Main Features

High / Low Power

Selectable power at a push of the programmable side buttons.

12.5 / 25kHz Channel Spacing

Selectable channel spacing for flexible migration.

Low Battery Alert

Alert users when battery level is low.

Adjustable Squelch Level (0-9)

Helps to optimize weak signals and minimize interference.

Voice Operated Transmit (VOX)

Hands free operation when used with audio accessories (optional).

Typical Applications

- Stocking
- Construction sites
- Property management
- Ports
- Hospitality

Accessories

Standard Accessories	U/V Antenna Li-ion Battery (1200mAh) BL1204	MCU Charger CH10A03 Switching Power PS1035(EU)	Belt Clip BC12 Strap RO03
----------------------	--	---	------------------------------

Optional Accessories



Ni-MH Battery (1300mAh) BH1303
Li-ion Battery (2000mAh) BL2001



MCU Rapid-rate Multi-unit Charger for Li-ion/Ni-MH Batteries MCA02



Six-unit Switching Power PS7001
Vehicle Adapter for Charger CHV09




Light-weight, Single-Muff Headset with in-Line PTT & VOX ECM12




Water Resistant Remote Speaker Microphone(IP56) SM13M1



Noise-Cancelling Remote Speaker Microphone (Antenna Applicable) SM13M2



Remote Speaker Microphone SM08M3




Receive-only Earpiece with Transparent Acoustic Tube (for use with remote speaker microphone) ESS08



Behind-the-head, Noise-cancelling & VOX Headset ECM14



Light Weight, Throat-Vibrating Earpiece ELM01




Ear Canal Bone Induction Earpiece EBM01



Earpiece with on-MIC PTT & VOX & Transparent Acoustic Tube EAM12



2-Wire Surveillance Earpiece with VOX & Transparent Acoustic Tube (black) EAM13



3-Wire Surveillance Earpiece with Transparent Acoustic Tube (black/beige) EAM16 / EAM15



D-earset with Boom Microphone & in-Line PTT & VOX EHM16



D-earset with in-Line PTT & Microphone & VOX EHM15



Universal Chest Pack (Nylon)(Black) LCBN13



Leather Carrying Case (non-swivel) LCBN56



Earbud with in-Line PTT & VOX ESM11

Earbud with on-MIC PTT & VOX ESM12

